





## Skid Plate Refurbishing Kits

Cardinal Skid Plate Refurbishment Kits are now available for the old style skid plate that consisted of an assembly and the new style skid plate which is a cast aluminum alloy. Although price the same, the two refurbishment kits are NOT interchangeable. To ensure you order the correct kit, compare your existing skid with the photos below. If you have an old style skid plate you will need to add a 'B' for Boot 'em at the end of the correct length. On the other hand if you have a cast aluminum alloy you will need to add a 'C' for Cast Away at the end of the part number.

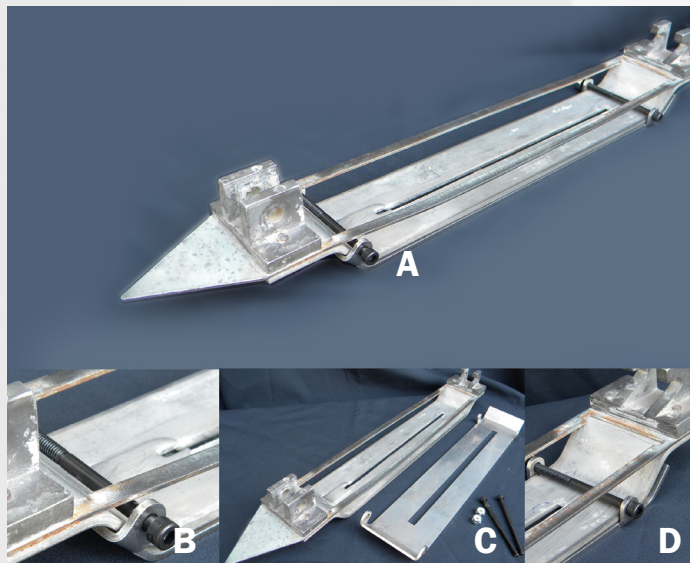

### BOOT 'EM

- A. Complete assembly
- B. Rear socket head cap screw
- C. Complete kit
- D. Front socket head cap screw

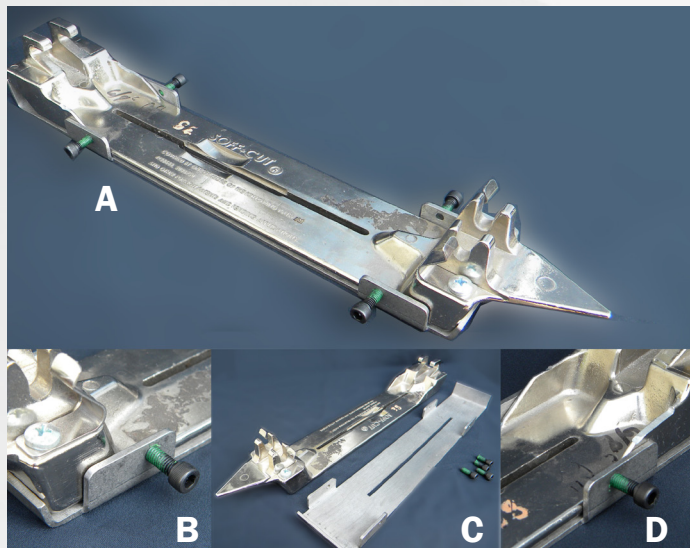

### CAST AWAY

- A. Complete assembly
- B. Insert front into plate and tighten securely
- C. Complete kit
- D. Rear socket head cap screw

## Cardinal Saws & Blades

100 Barren Hill Road

Conshohocken, PA 19428

Telephone: 1-610-828-6606

Fax: 1-610-828-7798

TOLL FREE:

1-888-503-3353

Fax: 1-888-504-4434

[www.cardinalsaws.com](http://www.cardinalsaws.com)

[cardinalsales@cardinalsaws.com](mailto:cardinalsales@cardinalsaws.com)



STANDARD THIN BLADES		
BLADE DIAMETER	BLADE THICKNESS	PART NUMBER LIST
5" AND 5.5"	0.095"	050 055 ____
6" AND 8"	0.095"	060 080 ____
9" AND 10"	0.100"	090 100 ____
12" AND 13.5"	0.120"	120 135 ____
12" AND 14"	0.120"	140 000 ____

THICK BLADES		
BLADE DIAMETER	BLADE THICKNESS	PART NUMBER LIST
5.15"	0.225"	050 225 ____
6" AND 8"	0.225"	060 225 ____
9" AND 10"	0.250"	090 250 ____
9" AND 10"	0.380"	120 380 ____
9" AND 10"	0.500"	140 500 ____

FOR X-4000 AND GX-4200 SAWS		
BLADE DIAMETER	BLADE THICKNESS	PART NUMBER LIST
12" and 13.5"	0.250"	120 250 ____
12" and 13.5"	0.380"	120 380 ____
12" and 13.5"	0.500"	120 500 ____

FOR X-3090 PAVER SAWS		
BLADE DIAMETER	BLADE THICKNESS	PART NUMBER LIST
12" and 14"	0.250"	140 250 ____
12" and 14"	0.380"	140 380 ____
12" and 14"	0.500"	140 500 ____

**Note:** Boot 'Em Refurbishment Kits for any thickness blades must be applied to an original Soff-Cut™ skid plate of the same blade thickness. If you do not already have a Soff-Cut™ skid plate for use with thick blades, we can machine a standard width plate at a charge of \$25.